



Pro-Clean POLY-PLEAT filters are cleanable / washable panel filters made up of non woven, high lofted synthetic (polyester) filter media and are available in various efficiency grades ranging from G2 to F5. POLY PLEAT filters offer very high dust holding capacity combined with lower resistance than the other types of similar grade panel filters.



Cleanair Resistance Vs. Air velocity

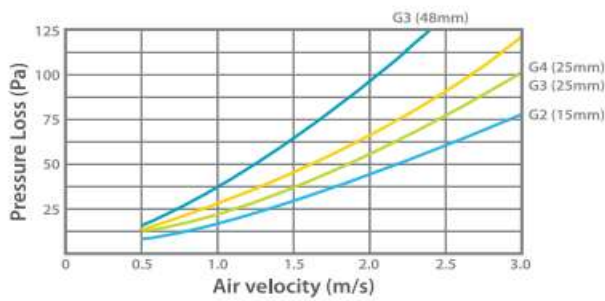

Model: FPG

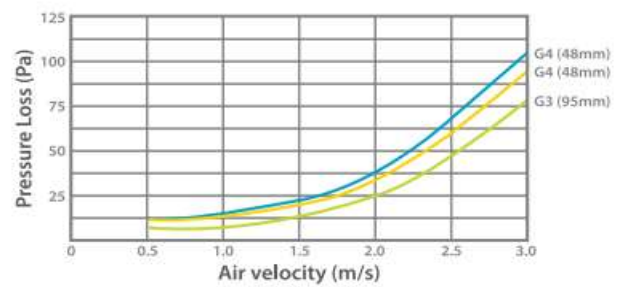

Model: FPF

Technical Data

Filter Model	FPG3	FPG4	FPG5	FPG3-2	FPG3-2	FPG4-2	FPG3-4	FPG4-4
Depth (mm)	25	25	25	48	48	48	94	94
Grade: EN 779 / Eurovent	G3	G4	F5	G3	G3	G4	G3	G4
Ave. Dust Spot Eff.	20-25%	25-30%	45-50%	<20%	20-25%	25-30%	20-25%	25-30%
Ave. Arrestance	91%	94%	95%	83%	91%	94%	91%	94%
Face Velocity (m/s)	1.5/2.5	1.5/2.5	1.5	1.5	2.5	2.5	2.5	2.5
Initial Resist. (Pa)	32 / 72	40 / 90	15	60	60	70	48	58
Final Resist. (Pa)	250	250	450	200	250	250	250	250