

SBT SERIES

Single Bag Housings, Top Flow Bolted Cover, #1 & #2 Industry Sizes

SBT Series housings robust design and high quality construction assures dependable protection for industrial and commercial applications.

PROCESS FLUIDS

- Water
(Fresh/Sea/R.O./D.I./Waste)
- Chemicals
- Food & Beverage
- Soaps & Detergents
- Oils
- Coolants
- Paints & Coatings
- Pulp & Paper



DESIGN SPECIFICATIONS

- Carbon Steel, 304SS or 316SS
- Eye-Nut/Swing Bolt Closure, 4-Bolt for high pressure operation safety
- 150psi max. working pressure / Hydro-tested @ 225psi
- 316SS Restrainer Basket w/ 9/64" perforations
- Differential/Drain/Vent Connections
- Top inlet with flow through cover improves flow distribution and pressure loss
- Machined cover seals directly on bag for bypass free filtration
- Reduced headroom for unfiltered liquid makes bag change outs quick & easy
- Stainless adjustable legs
- Standard Buna-N Seals
- Finish: 2-Part Epoxy on Carbon Steel / Passivation & Glass Bead on 314SS & 316SS

OPTIONS


- NPT / ANSI 150# Flanges / Sanitary Connections
- Side In, Side Out / Side in, Bottom Out / Custom
- Seal materials (Viton, EPDM, Encaps. Teflon, Silicone)
- Electropolish Finish
- ASME Code Stamp
- Mesh Lined Basket
- Custom OEM designs

HOUSING DATA

Size	Basket Dims (in)	Surface Area (f2)	Max. Flow (gpm)*
#1	6.7 x 15	2.3	100
#2	6.7 x 30	4.4	200

*Maximum flow rates through housings determined with water and no filter bag installed. Viscosity, filter bag and connection size will affect flow rates.

(MODEL SBT) CONNECTION SIZE VS. PRESSURE DROP

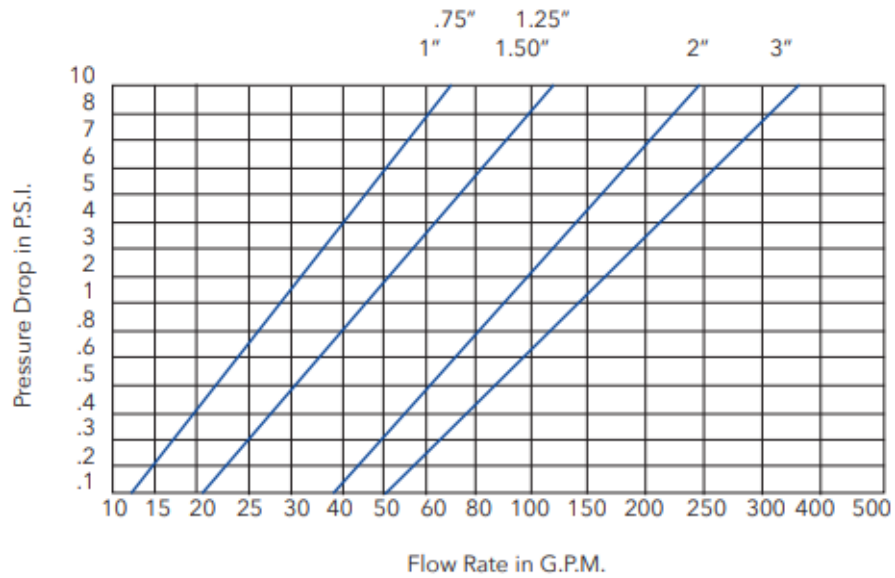

BUILDING A PART NUMBER: (SBT-1-2-N-A-6-15=#1, 2" NPT, SIDE OUT, 316SS)

Series	Basket Size	Connection Size	Connection Type	Outlet Location	Material	Pressure Rating
SBT	#1	1-1/2"	N=NPT	A=Side	C=Carbon Steel	
	#2	2"	F=Flange	B=Bottom	4=304SS	15=150psi
		3"	T=Tri-Clamp		6=316SS	